

RACK DISPENSER

- STAINLESS STEEL
- DOUBLE SPRING BANK MECHANISM
- SELF LEVELING, FIELD ADJUSTABLE

- BUILT-IN COUNTER
- HEATED
- SINGLE OR DOUBLE

Model Series: TRDBH-IC-*

APPLICATION:

- Cafeterias
- Serving lines
- Serving stations

CAPACITY:

- Racks: 5 to 6 racks per stack
- Baskets: 5 to 6 baskets per stack

DISPENSES:

- Chinaware in racks
- Chinaware in baskets

SPECIFICATIONS:


- Stainless steel; Type 304
- “Heliarc” and spot welded construction
- Die formed uni-frame assembly with upright support channels
- Built in; in counter
- Flush mount installation
- Double spring bank dispensing system with roller bearings fit into guide runners for smooth operation
- Dispensers are equipped with non-rusting springs that are heat treated for strength & durability
- Carrier is removable to allow for adjustments after installation
- “On/Off” switch and pilot light are mounted on the top flange
- Approved power supply cord with 3 prong end cap

ELECTRICAL DATA:

- 120V, 60Hz, 1 Phase, 1000 Watts
- 8.3 Amps (208V & 240V units available upon request)
- NEMA 5-15 End Cap

OPTIONAL FEATURES [1]:

- NP - Stainless steel nameplate
- Remove (*) from model code for non-NSF models

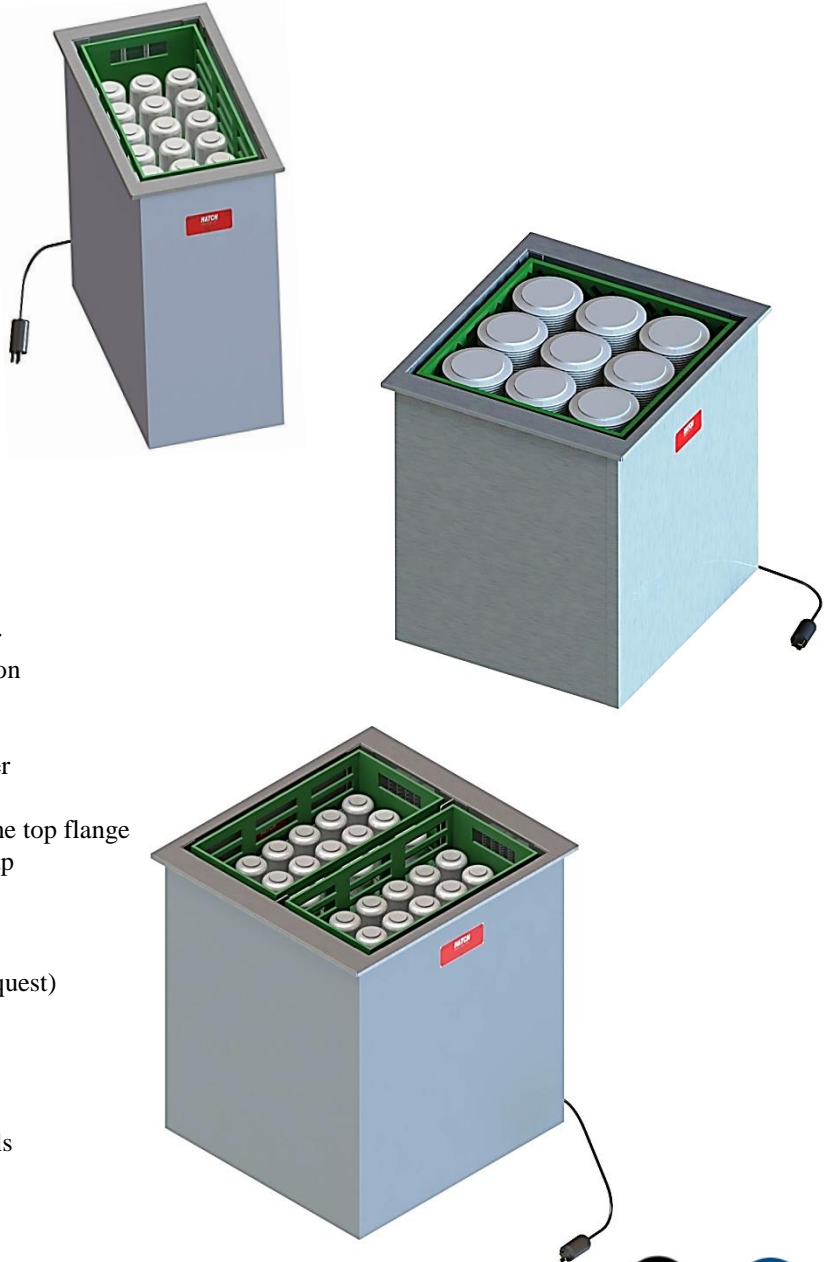

© Copyright 2012 Hatch Industries Limited



CANADA/USA TOLL FREE: 1-800-387-6969 FAX: 1-519-822-8365 www.hatchindustries.com

211 Dawson Road, Guelph, Ontario, Canada N1H 1A3
Specifications subject to change without notice.


Custom Designs
Available

RACK DISPENSER

- STAINLESS STEEL
- DOUBLE SPRING BANK MECHANISM
- SELF LEVELING, FIELD ADJUSTABLE


- BUILT-IN COUNTER
- HEATED
- SINGLE OR DOUBLE

Model #: TRDBH-IC-*

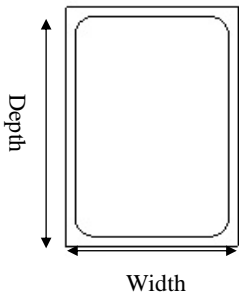


MODEL	RACK SIZE	FLANGE WIDTH	FLANGE DEPTH	WEIGHT APP.
TRDBH-IC-1020*	10" x 20" 254mm x 508mm	14.5" 368mm	24.5" 622mm	35lb 15.9kg
TRDBH-IC-2020*	20" x 20" 508mm x 508mm	24.5" 622mm	24.5" 622mm	40lb 18.2kg

Model #: TRDBH-IC-2-*

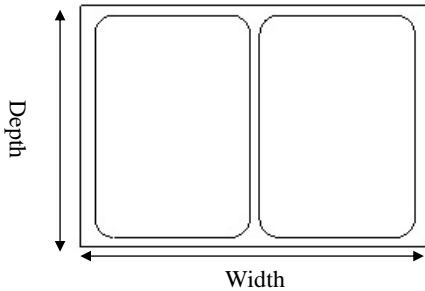

Each carrier works independently of the other

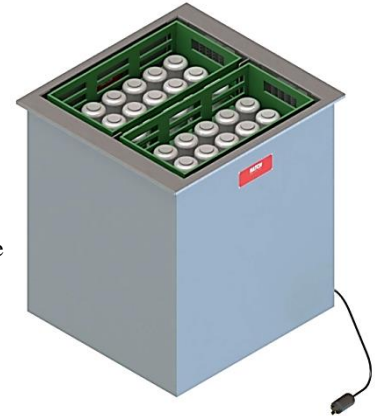

MODEL	RACK SIZE	OVERALL FLANGE WIDTH	OVERALL FLANGE DEPTH	SHIPPING WEIGHT APP.
TRDBH-IC-1020-2*	10" x 20" 254mm x 508mm	25.5" 648mm	24.5" 622mm	50lb 22.7kg

Height from mounting surface to bottom of unit is 27.5" (698.5mm).
 Inside rack capacity is 21" (533.4mm) to the top of the flange.
 Refer to factory for counter cut-out locations and dimensions.
 Shorter sizes available upon request.